




REDRING SELECTRONIC PREMIER PLUS 8.5 & 9.5 kW



BRISTAN JOY CARE 8.5 kW

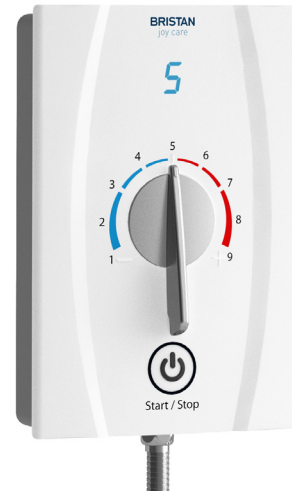

REDRING SELECTRONIC SPECIFICATION

Thermostatic control	Temperature maintained within +/- 1°C
Power rating 8.5kW	kW Loading @ 230-240V: 7.8 -8.5
Power ratings 9.5kW	kW Loading @ 230-240V: 8.7 -9.5
Fuse ratings	8.5kW: 35amp & 9.5kW: 40 amp
Temperature Lock Mode	3 settings eliminate accidental increase
Temperature stabilised	Fully
Phased shutdown	Yes
Start / Stop	Large easy press power button
Cable size recommended	6-10mm ²
Fixing pack supplied	Yes
Operating water pressure	0.7-10 bar (10-145 psi)
Cable entries	Top, bottom & rear (up to 16mm ²)
Pipe entries	Top, bottom & back (on right hand side)
Water connection	15mm compression fitting

BRISTAN JOY CARE SPECIFICATION

Inlet connection	15mm push swivel fit
Outlet connection	½" BSP male threaded
Minimum working pressure	0.5 Bar
Maximum working pressure	10.0 Bar
Static pressure range	0.2 - 10.0 Bar
System requirements	Mains cold water pressure only
Thermostatic	Yes
Maximum temperature setting	Yes
Auto shut off	Yes
3 power settings	Cold, warm & Eco & hot
Push Button On/Off	Yes, soft touch
Cable entry points	5
Water entry points	5

REDRING SELECTRONIC PREMIER PLUS

- Fully thermostatic - maintains temperature within +/- 1°C.
- Pre-programmed to provide automatically hot water at a safe temperature.
- Temperature 'Lock Mode', eliminates any increase by accident.*
- Audible feedback response to push-button commands.
- Large one touch, easy to press Start / Stop button.
- Clear print control identification for ease of visibility.
- Large LED temperature read-out display.
- 1m riser rail & 2m hose.
- **Eco Water Save** automatically adjusts the optimum flow rate.*
- Safety temperature lock with override function.
- Phased shutdown & automatic shutdown after 30 minutes of inactivity.
- 8.5 and 9.5kW models available.
- Requires Venturi flowswitch for use with a P12 pump or standard Whale pump.
- WP model links directly to a shower waste pump. **(Does not need a flowswitch).**
- 5 year parts & labour guarantee. **Requires registration with Redring.**

*Selected on installation.

BRISTAN JOY CARE 8.5kW

- Instantaneous 8.5kW electric shower drawing water direct from the mains supply, ideal for installations without stored hot water & second bathrooms.
- Factory settings can be adjusted at installation to suit the user requirements.
- Soft touch button, LED readout, audible bleeps (can be deactivated), lever dial & contrasting finish.
- Flexible fit with multiple water and cable entry points, digital fault code display & simple commissioning means a fast, fuss-free, new or replacement installation.
- Phased shut down feature ensures all hot water is flushed out of the shower after use prolonging the shower life.
- Adjustable 1 metre riser rail comes complete with adjustable top / bottom brackets, ideal to cover existing riser holes and tile joints.
- ThermoSafe™ Technology: Regulates the output water to minimise high/dangerous output temperatures for a safer showering experience.

Description	Reference
Selectronic Premier Plus 8.5kW	06ES32-85
Selectronic Premier Plus 9.5kW	06ES33-95
Selectronic Premier Plus WP 8.5kW	06ES38-85WP
Selectronic Premier Plus WP 9.5kW	06ES39-95WP
Venturi Flowswitch	05WP10-53
Joy Care 8.5kW	06ES50-85

Full technical electric shower details can be found at www.contour-showers.co.uk

