


BODY DRYER

- Easily dry the users body properly with minimum effort.
- Warm pressurised air eliminates any rubbing or chaffing of the skin.
- Easily operated control either by the push button located on the unit or via a remote air operated bellows, *see inset left*.
- Average air outlet temperature 20°C / 68°F.
- Suitable for corner installation in the shower or over a bathtub.
- Regular use helps reduce limescale build up & mould growth in the shower area.
- When used with the Tern rotating, level access shower tray, it puts the user in complete control of their showering routine, *see page 18*.

Description	Reference
Body Dryer	04BD-01

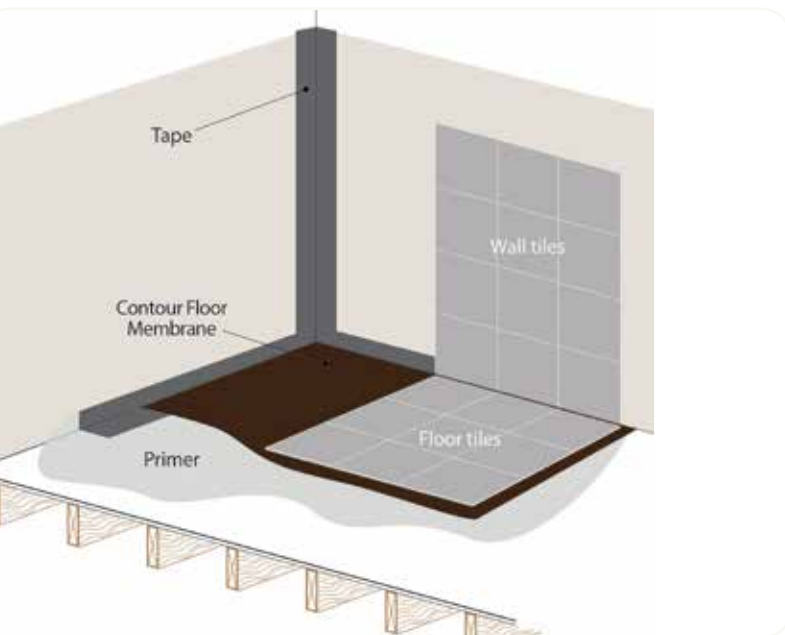

WETROOM TANKING MEMBRANE

- A pre-formed flexible self-adhesive waterproof membrane.
- Permanent waterproof bond for use prior to laying tiles onto a wetroom floor.
- Ideal for use on timber, masonry, concrete, plasterboards, gypsum & existing ceramic or natural stone.
- Once applied, the membrane is ready to tile immediately.
- Membrane is cold applied, consisting of a 1mm thick butyl waterproof layer, incorporating a fleece on one side.
- Can be installed over a thermal board. Heating restricted at 32°. Electrical heating max 150w.
- Guaranteed for the lifetime of the tiled area when installed as per the manufacturers recommendations.
- Available in 5m² or 10m² kits.

Kit contents:

- 5m² or 10m² Membrane,
- 500ml Primer,
- 10m Reinforcing Tape,
- 1 x Jointing Compound,
- 4 x Pre-formed Internal Corners.



Wetroom tanking membrane kit

Description	Reference
5m ² Tanking Kit	15WTK-50
10m ² Tanking Kit	15WTK-10